



# TLI-DN22618

## TECHNICAL

Light Source	SMD
Color Temperature	3000/5500k
Luminous Efficiency@4000K	92Lm/W
CRI	>80
Beam Angle(°)	110°
Lifetime(hr)	40,000h
Product Finishing	White


## FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-in
Dimming Option	Triac
Ingress Protection (IP Rating)	IP 54
Power Factor(PF)	≥0.9
Certification	SAA/RoHS/CE/CB

## DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN22618-10W-2D	10W	AC200-240V	Ø106x40	Ø90-95	720-810lm

## EXPERIENCE

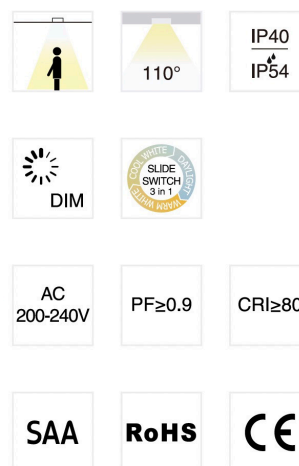

## INSTALLATION & ACCESSORIES

