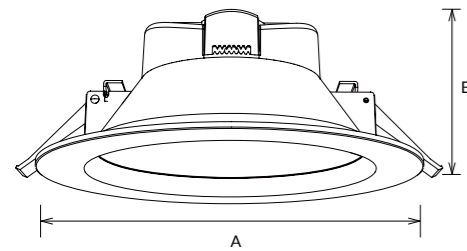



















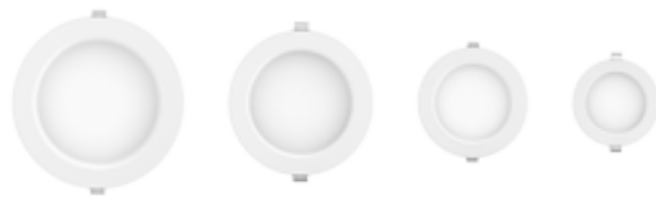
# DN08A04-14W

Downlight



DN08A04-14W LED downlight with SMD LED, plastic coated aluminum heat sink, internal driver. IP40/IP54 available for choice. CCT switchable by slide switch is available.



- ▶   
- ▶     
- ▶    
- ▶   



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DN080A04-14W-WW	14W	Ø145x61	Ø120-130	1100lm	0.28	30PCS
DN080A04-14W-3CCT	14W	Ø145x62.5	Ø120-130	1300lm	0.28	30PCS

Ring

ACC-DL54  
Nickel brushed

Trim

White

