



TLI-DN819

DOWNLIGHT

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminum
Light Source	CREE/Bridgelux
Color Temperature	3000/4000/5000K
Luminous Efficiency@4000K	90lm/W
CRI	≥90
Beam Angle(°)	24°/36° adjustable angle up to 30°
UGR	<19(24°)
Lifetime(hr)	50,000h
Product Finishing	White / Black


FEATURES & BENEFITS

CCT Selection	3CCT
LED Driver	Built-out
Dimming Option	Triac/ 0-10v/DALI
Ingress Protection (IP Rating)	IP20
Power Factor(PF)	≥ 0.9
Certification	SAA/ RoHS/CE

DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-DN819-5W	5w	AC200-240V	Ø80X75mm	Ø55mm	410lm
TLI-DN819-7W	7w	AC200-240V	Ø100X82mm	Ø75mm	615lm
TLI-DN819-10W	10w	AC200-240V	Ø100X82mm	Ø75mm	920lm
TLI-DN819-12W	12w	AC200-240V	Ø125X107mm	Ø95mm	1125lm
TLI-DN819-15W	15w	AC200-240V	Ø125X107mm	Ø95mm	1425lm
TLI-DN819-20W	20w	AC200-240V	Ø125X107mm	Ø95mm	1900lm

EXPERIENCE

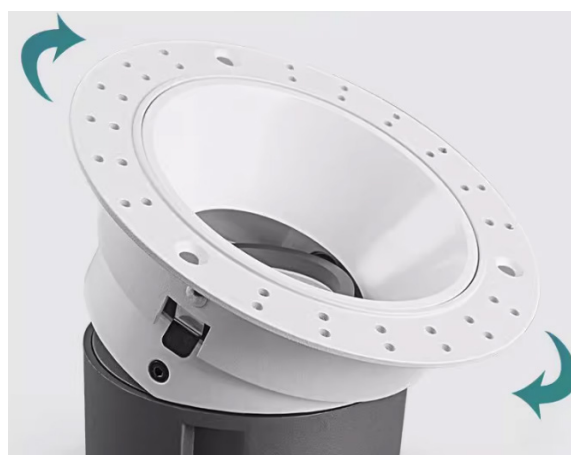

INSTALLATION & ACCESSORIES

