




# TLI-SM

## LED INGROUND LIGHT

### TECHNICAL

Materials of Optics	Glass
Materials of Housing	Stainless Steel
Color Temperature	2700/6500k
Luminous Efficiency@4000K	25lm/W
CRI	>85
Beam Angle(°)	5°/15°/30°/45°/60°
Lifetime(hr)	40,000h
Product Finishing	Stainless Steel

### Light distribution curve

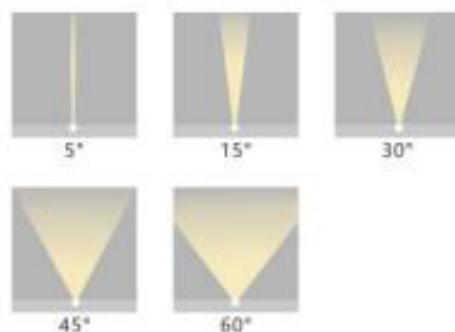

A Variety Of Styles Are Available



### FEATURES & BENEFITS

LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP 65
Impact Resistance (IK Rating)	IK08
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB

### INSTALLATION & ACCESSORIES



### DATA SHEET

CODE	WATT	INPUT VOLTAGE	DIMENSION(mm)	CUT-OUT(mm)	LUMEN(±5%)
TLI-SM-3WSXD	3W	DC24V	Ø100x100	Ø90mm	75lm
TLI-SM-6WSXD	6W	DC24V	Ø130x110	Ø115mm	150lm
TLI-SM-9WSXD	9W	DC24V	Ø150x105	Ø140mm	225lm
TLI-SM-12WSXD	12W	DC24V	Ø180x115	Ø168mm	300lm
TLI-SM-15WSXD	15W	DC24V	Ø210x135	Ø196mm	375lm
TLI-SM-18WSXD	18W	DC24V	Ø240x145	Ø225mm	450lm